



APPLICATION


- Process control in aquaculture
- Long-term monitoring in hydroelectricity reservoirs
- Survey of coastal waters

FEATURES

- Maintenance limited to a few minutes a month
- No recalibration
- Plug-and-play
- Continuous monitoring
- Reliable and accurate values from 1 - 50 mg / l

SPECIFICATIONS

- Weight sensor alone: 2.3 kg
- Range: 0 - 50 mg / l
- Operation temperature: +2°C to +40°C
- Storage temperature: -10°C to +50°C, <85% humidity
- Water tight: IP68 5bar
- Output: 4 - 20mA
- Power supply: 110 / 230 VAC (50 / 60 Hz)
- Current drain: 200mA

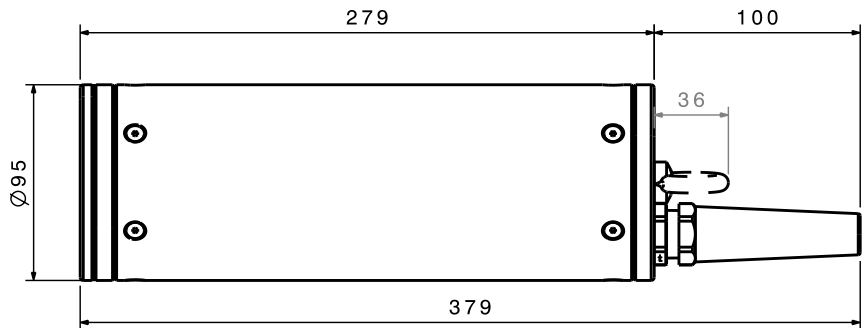

Dimensions in mm

AUDITED NORM COMPLIANCE FOR OPERATION IN INDUSTRIAL INSTALLATION

- CE compliant
- Electromagnetic compatibility EN50270:2006 (Type I Class B, Type II), EN61000-3-2:2006, EN61000-3-3:1995+A1:2001+A2:2005
- Shock and Vibration IEC 60068-2-6, DIN EN22248